


PRIORITY DOCUMENT

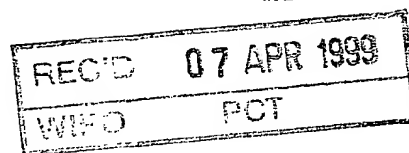

EU

Kongeriget Danmark

0428/98

Patent application No.: 0428/98

Date of filing: 25 Mar 1998

Applicant: Reipur Technology A/S, Gentoftegade 118-120,
2820 Gentofte, DK

This is to certify the correctness of the following information:

The attached photocopy is a true copy of the following document:

- The specification, claims and drawings as filed with the application on the filing date indicated above.

By assignment dated 18 Sep 1998 and filed on 20 Oct 1998, the application has been assigned to Reipur Technology A/S.

Erhvervsministeriet
Patentdirektoratet

TAASTRUP 10 Mar 1999

Jytte Hansen
Jytte Hansen
Kontorfuldmægtig



PLOUGMANN, VINGTOFT PARTNERS

0428/9825 MRS. 98

COPENHAGEN OFFICE:
SANKT ANNÆ PLADS 11
POST OFFICE BOX 3007
DK - 1021 COPENHAGEN K
A/S REG. NO. 223795
TELEPHONE +45 33 63 93 00
TELEFAX +45 33 63 96 00
e-mail pv@pv.dk




Artist Bjørn Bjørnholt

AARHUS OFFICE:
RÅDHUSPLADSEN 1
POST OFFICE BOX 49
DK - 8100 AARHUS C
TELEPHONE +45 87 32 18 00
TELEFAX +45 33 63 96 00
e-mail pv@pv.dk

25. marts 1998

Ny dansk patentansøgning
A method for selectively generating a flow of gas
John Reipur
Vor ref: 21119 DK 1


Plougmann, Vingtoft & Partners

Ole Plougmann
Knud Erik Vingtoft
Anne Pors
Henrik Rastrup Andersen
Peter Gjerding
Jeff Salka
Anne Schouboe
Henry Søgaard
Marianne Johansen
Michael Gaarmann
Cert Høy Jakobsen

Annemette Ellermann
Anne-Marie Lademann
Susie P. Arnesen
Jan Simonsen
Peter Koefoed
Jesper Thorsen
Inge Liborius
Dorte van Kaam
Nanna Wigo
Lone Frank
Jakob Pade Frederiksen
Per Jørgen Nygreen
Kim Wagner
Camilla Rendal Andersen
Jens Jørgen Schmidt
Cornelius Cazacu
Maria Jordanis
Steen Madsen
Martin Hancock
Anja Grünbaum
Heidi Petersen
Flemming Vester
Christa Theil
Henrik Villumsen

Stephen H. Atkinson, Boston

Documentation
Hanne Plougmann

Chief Accountant
Helle Primdahl

The present invention relates to a method for selectively generating a flow of gas from an open end of a tubular body, such as a hose.

A conventional system for producing a flow of pressurised air comprises a compressor, a pressure tank to which pressurised air is delivered from the compressor. The function of the compressor is controlled in dependency of the pressure in the tank so as to maintain the air pressure in the pressure tank substantially at a desired level. Such conventional system comprises air separators and valves which must be able to close tightly.

The present invention provides a method rendering it possible to selectively generate an air flow in a manner which is much more simple than by using conventional pressurised air systems.

Thus, the present invention provides a method for selectively generating a flow of gas from an open first end of a tubular body, said method comprising connecting a second end of the tubular body directly to a gas outlet of a gas compressor, starting the operation of the compressor so as to start the gas flow, and stopping the gas flow by stopping the operation of the compressor. This method does neither require the use of a pressure tank, water separators, nor pressure tight valves. Furthermore, a gas compressor having a relatively small capacity can be used as long as the compressor is able to deliver the desired gas flow.

Therefore, when a gas flow having a predetermined flow rate is desired, the capacity of the gas compressor may be selected so as to obtain the desired gas flow rate through said open free end of the tubular body.

In the method according to the invention generation of the gas flow may be started and stopped by starting and stopping the gas compressor. This means that when the compressor is

driven by an electric motor, the operation of the electric motor and thereby generation of the gas flow may be started and stopped by actuating an electric switch. In order to facilitate operation of the compressor such on/off switch for
5 controlling power supply to the electric motor is advantageously positioned on the tubular body at or adjacent to its open first end.

If the open first end which may, for example, be in the form of a nozzle, is unobstructed the gas flow rate will be
10 substantially constant when the gas compressor is operating. However, the tubular body may comprise a wall part being made from a resilient material. If the open first end of the tubular body is then at least partly closed and subsequently reopened while the compressor is still operating, the
15 resilient wall part will be temporarily expanded, whereby a pressure pulse may be generated.

This may be helpful in situations where a short, more powerful gas flow is needed.

The open first end of the tubular body may have a valve or a
20 manually operateable obstructing member which may be moved between positions in which the first end of the tubular body is at least partly obstructed and substantially unobstructed, respectively. In the preferred embodiment, however, the wall part defining or being adjacent to the open first end of the
25 tubular body is made from a resilient material. The open first end of the tubular body may then be at least partly closed by compressing said resilient wall part.

The first open end may be in the form of or may be connected to a nozzle, and liquid, such as water or an aqueous liquid
30 containing one or more additives may then selectively be introduced into the open first end part of the tubular body or into the nozzle. When a liquid flow is introduced while the gas compressor is inoperative a liquid flow may be generated through the open first end of the tubular body. If

liquid is introduced into tubular body when the gas compressor is operating an aerosol flow may be generated.

A flow of gas, liquid or aerosol generated by using the method according to the invention may e.g. be used for blow
5 cleaning any kind of articles, such as electronic articles, and a liquid detergent may then be introduced into the tubular body. Alternatively, the liquid being introduced into the tubular body or nozzle may be a disinfectant. The flow
10 of gas, such as air, the flow of liquid, such as water, and the flow of aerosol, which may be generated by the method according to the invention is especially suited for use by dentists for cleaning the teeth of a patient.

The present invention also provides an apparatus for selectively producing a gas flow, said apparatus comprising a
15 gas compressor having a gas inlet and a gas outlet, an electric motor for driving the gas compressor, means for switching the electric motor on and off, and a tubular body having an open first end part and second opposite end part communicating directly with the gas outlet of the compressor,
20 the capacity of the compressor being such that a desired gas flow through the first open end part is obtained when the gas compressor is operating. The apparatus according to the invention is much more simple and more easy maintain than conventional systems for producing pressurised air

25 The switching means is preferably positioned on the tubular body at or adjacent to the open first end of the tubular body so that an operator who is gripping said open first end part may conveniently operate the switching means. The tubular body may comprise at least one resilient wall part and
30 manually operateable means, such as valve means or other obstruction means, may then be provided for selectively closing the open end of the tubular body at least partly. At least the first end part of the tubular body may be made from a resilient material so that it may be compressed and thereby
35 at least partly closed.

The apparatus according to the invention may further comprise an outer tube section made from a stiff material and surrounding the free first end part of the tubular body. The manually operateable closing means, such as a pinching
5 device, may then be mounted on this outer tube section. As an example, the switching means may comprise a micro switch embedded in the resilient wall of the free end part of the tubular body. The switching means may then automatically be actuated when the manually operateable means are operated in
10 order to at least partly compress and close the open first end part of the tubular body.

The apparatus according to the invention may further comprise a liquid delivery tube opening into the free end part of the tubular body, and means for selectively delivering liquid
15 into the free end part of the tubular body via the delivery tube. These liquid delivery means may comprise a liquid pump and an electric motor for driving the pump and the operation of the electric motor driving the pump may be controlled by switch means which are arranged at or adjacent to the first
20 end part of the tubular body. The said first end part of the tubular body or hose, or said outer tube section may be in the form of a nozzle, or the tubular member or hose may be connected to such nozzle. An operator holding the nozzle in his hand may then conveniently control the function of not
25 only the gas compressor, but also of the liquid pump.

The open end of the liquid delivery tube is preferably directed towards the open end of the tubular body so that a liquid jet leaving the liquid delivery tube may pass further through the open end of the tubular body which may, for
30 example, be in the form of a hose of a resilient material.

The invention will now be further described with reference to the drawings, wherein

Fig. 1 is a diagrammatic side view of an embodiment of the apparatus according to the invention.

Fig. 2 is a side view in an enlarged scale of a nozzle formed at the free end of a hose forming part of the apparatus shown in Fig. 1,

Fig. 3 is an end view of the nozzle shown in Fig. 2, and

5 Figs. 4 and 5 are sectional views illustrating the function of a manually operateable switching and valve device.

The drawings illustrate an apparatus or unit for selectively generating a flow of air or gas, a flow of water or another liquid, or both. Such apparatus is suited for use by dentists
10 for cleaning and treating the teeth of a patient.

The apparatus shown in Fig. 1 comprises a piston compressor 10 comprising a suitable number of cylinders. In the present case four cylinders are arranged on either side of a common crank shaft. The shaft of a brushless DC electric motor 11 is
15 connected to the crank shaft, e.g. by means of a coupling device as that described in a Danish patent application (filed at the same time as the present application, our ref. 21121DK1). The manifold tubes 12 of the compressor are connected to a hose 13 having a nozzle 14 formed at its free
20 end. A liquid pump 15 is driven by an electric motor 16 which may correspond to the electric motor 11, and the outlet of the pump 15 is connected to a tube 17 having a free end opening into the free end or nozzle of the hose 13, vide Fig. 2.

25 The free end of the hose 13 is received in a nozzle tube 18 which may be made from a relatively stiff material, such as metal or plastic, while the hose 13 is preferably made from a resilient, elastic material, such as rubber, silicone or a soft plastic material. The free ends of the hose 13 and of
30 the tube 17 open into the nozzle tube at the free end of the nozzle and as illustrated in Fig. 2. A flexible valve arm or switching arm is mounted on the outer surface of the nozzle tube 18. An obstruction member 20 extends inwardly from the free end of the arm 19 and is positioned oppositely to a cut-
35 out or opening 21 formed in the nozzle tube 18. The free end

of the arm 19 also carries a pair of electric switches 22 and 23 for controlling the function of the electric motors 11 and 16, respectively.

When the switch 22 is depressed the electric motor 11 is
5 started so that a flow of air or gas through the hose 13 and out from the opening of the nozzle 14 is generated. The air flow may be stopped by the depressing the switch 22 once again so as to stop the electric motor 11 and the compressor 10. Similarly, a flow of water or another liquid may be
10 generated by depressing the switch 23 whereby the electric motor 16 is started. It is also possible to depress the switches 22 and 23 at the same time so as to generate a flow of air and water or another liquid. The rate and force of the flows generated correspond to the capacity of the compressor
15 10 and the liquid pump 15, respectively.

However, in some situations the operator or dentist may want to generate a more forceful flow pulse. This may be obtained by applying an increased force to the switch 22 and/or 23 so as to flex the arm 19 inwardly, whereby the obstruction
20 member is passed through the opening or cut-out 21 and locally pinches the hose 13 as best illustrated in Fig. 4 and 5. When the hose 13 is pinched as illustrated in Fig. 5 and a compressor 10 and/or the pump 15 continue(s) to operate the hose section being upstream of the obstruction member 20 will
25 be elastically expanded. When the operator shortly after releases the switches 22 and/or 23 the arm 19 and the obstruction member 20 return to the starting position shown in Fig. 4. Now the elastically expanded tube 17 return to its normal position whereby a pressure pulse is generated in the
30 flow of air and/or liquid.

The apparatus shown in Fig. 1 may be formed as a hand held unit and may replace much more bulky and space consuming conventional pressurized air systems. The apparatus according to the invention may be made portable or may be built into a

unit also containing other kinds of dentist tools and apparatuses.

CLAIMS

1. A method for selectively generating a flow of gas from a open first end of a tubular body, said method comprising connecting a second end of the tubular body directly to a gas outlet of a gas compressor,
5 starting the operation of the compressor so as to start the gas flow, and
stopping the gas flow by stopping the operation of the compressor.
- 10 2. A method according to claim 1, wherein the capacity of the gas compressor is selected so as to obtain the desired gas flow rate through said open free end of the tubular body.
- 15 3. A method according to claim 1 or 2, wherein the compressor is driven by an electric motor, the operation of the electric motor being started and stopped by actuating a switch positioned on the tubular body at or adjacent to its first open end so as to control power supply to the electric motor.
- 20 4. A method according to any of the claims 1-3, wherein the tubular body comprises a wall part being made from a resilient material, the open first end of the tubular body being at least partly closed and subsequently reopened while the compressor is still operating, so as to temporarily expand the resilient wall part, whereby a pressure pulse may
25 be generated.
- 30 5. A method according to claim 4, wherein the wall part defining the open first end of the tubular body or being adjacent thereto is made from a resilient material, the open first end of the tubular body being at least partly closed by compressing said resilient wall part.

6. A method according to any of the claims 1-5, wherein liquid is selectively introduced into the open first end part of the tubular body forming a nozzle.

7. A method according to claim 6, wherein liquid is
5 introduced into tubular body when the gas compressor is operating.

8. A method according to claim 6, wherein the liquid is sprayed out from the open free end of the tubular body when the gas compressor is not operating.

10 9. A method according to any of the claims 1-8, wherein the gas flow generated is a flow of air used by a dentist for cleaning the teeth of a patient.

10. An apparatus for selectively producing a gas flow, said apparatus comprising
15 a gas compressor having a gas inlet and a gas outlet, an electric motor for driving the gas compressor, means for switching the electric motor on and off, and a tubular body having an open first end part and a second opposite end part communicating directly with the gas
20 outlet of the compressor, the capacity of the compressor being such that a desired gas flow through the open first end part is obtained when the gas compressor is operating.

11. An apparatus according to claim 10, wherein the switching means is positioned on the tubular body at or adjacent to the
25 open first end of the tubular body.

12. An apparatus according to claim 10 or 11, wherein the tubular body
comprises at least one resilient wall part, manually operateable means being provided for selectively closing the
30 open end of the tubular body at least partly.

13. An apparatus according to claim 12, wherein at least the first end part of the tubular body is made from a resilient material.

5 14. An apparatus according to claim 13, further comprising an outer tube section made from a stiff material and surrounding the first end part of the tubular body, the manually operateably closing means being mounted on the outer tube section.

10 15. An apparatus according to claims 13 or 14, wherein the switching means comprise a micro switch embedded in the resilient wall of the first end part of the tubular body, the switching means being actuated when the manually operateable means are operated so as to at least partly compress and close the first end part of the tubular body.

15 16. An apparatus according to any of the claims 10-15, further comprising a liquid delivery tube opening into the first end part of the tubular body, and means for selectively delivering liquid into the first end part of the tubular body via the delivery tube.

20 17. An apparatus according to claim 16, wherein the liquid delivery means comprise a liquid pump and an electric motor for driving the pump, the operation of the electric motor driving the pump being controlled by switch means arranged at or adjacent to the first end part of the tubular body.

25 18. An apparatus according to claim 16 or 17, wherein the open end of the liquid delivery tube is directed towards the open end of the tubular body.

30 19. An apparatus according to any of the claims 10-18, wherein the tubular body is in the form of a hose of a resilient material.

20. An apparatus according to any of the claims 10-19,
wherein the tubular body is of the type used by dentists for
cleaning teeth.

21. An apparatus according to any of the claims 10-20,
5 wherein the electric motor is a brushless DC-motor.

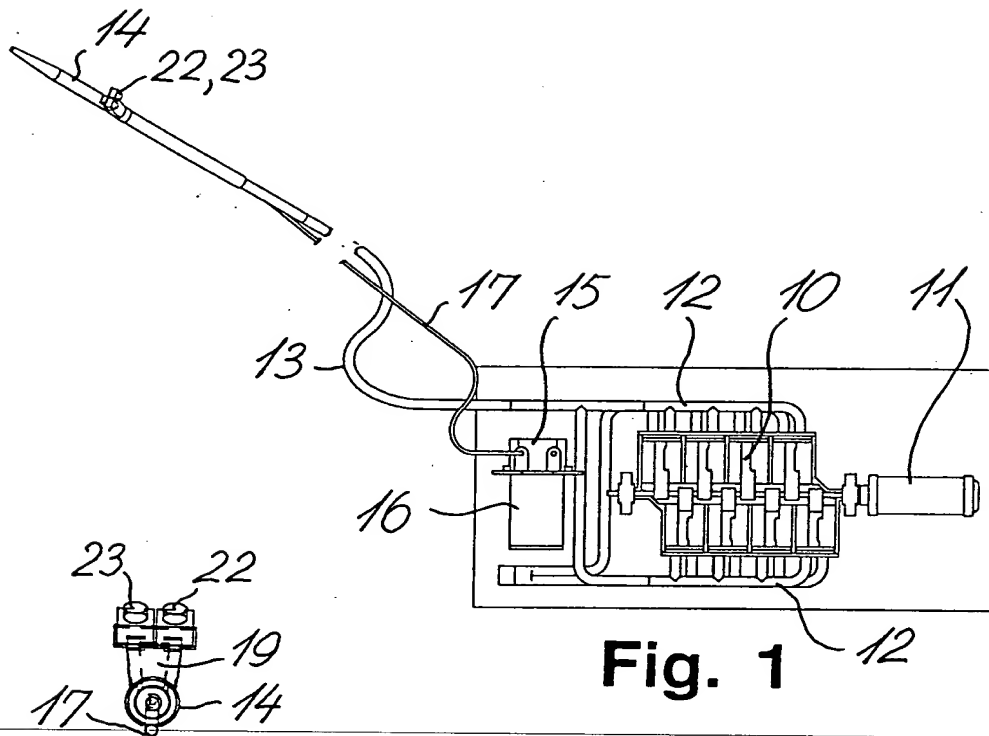


Fig. 3

